

Broadcasting

TDE020UHF

Characteristics

TDE020UHF


is a broadband UHF low power amplifier, based on MRF6VP3091NR1 LDMOS device in a TO-270WB-4 plastic package.

TDE020UHF

works in AB class and it is able to cover the whole frequency band 470-862 MH_z.

MAIN FEATURES

- High Gain
- High Linearity

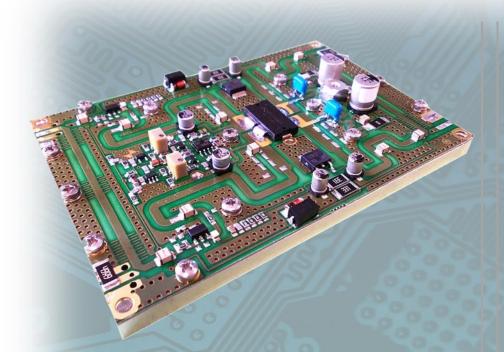

DVB-T/T2 Performance Summary


Parameter	Min.	Тур.	Max.	Units	Note
Power	10	12	10	W _{rms}	0,0
Frequency Range	470	1.5	862	MHz	20
Gain	33	35		dB	12
Input Return Loss	11 1	-15		dB	1//4
Voltage Supply	0	48	50	V_{dc}	70/1P
Bias Current		0.5		Α	
Shoulders Level	-30	- 1111	11/2/	dB _c	(*)
Efficiency	10		1	%	(**)











Broadcasting


Notes

- (*) The shoulder level is referred to typical power out
- (**) The efficiency is referred to typical power out

Screws Type

- Screws point 1-2-3-4
 - M3 socket head cap screws
 - + 4 split lock washers WZ ø 3.5
 - + 4 flat washers WZ ø 3.5
- Screws point 5-6
 - M2.5 socket head cap screws
 - + 2 split lock washers WZ ø 2.5
 - + 2 flat washers WZ ø 2.5

Mechanical Specifications

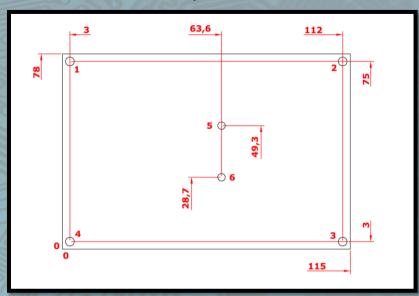

TDE reserve the right to make changes to the product(s) or information contained herein without notice. TDE doesn't assumes responsibility for any errors which may appear in this document. Warranty information applicable to the product identified here in is available upon request. Nothing contained herein shall constitute a warranty, representation or guarantee of any kind. TDE expressly disclaims all other warranties, express and/or implied including but not limited to warranties of merchantability, and of fitness for a particular purpose, use or application.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of TDE.







